

# > axr9


Excellent printing quality on textile materials

Excellent resistance to some solvents and detergents

Very good resistance to heat

**AXR®9 is a resin ribbon initially designed for the textile label printing market.**


It can also represent a relevant solution for niche resin applications (involving for example sterilization or resistance to some solvents) which are not satisfied by other resin ribbons.

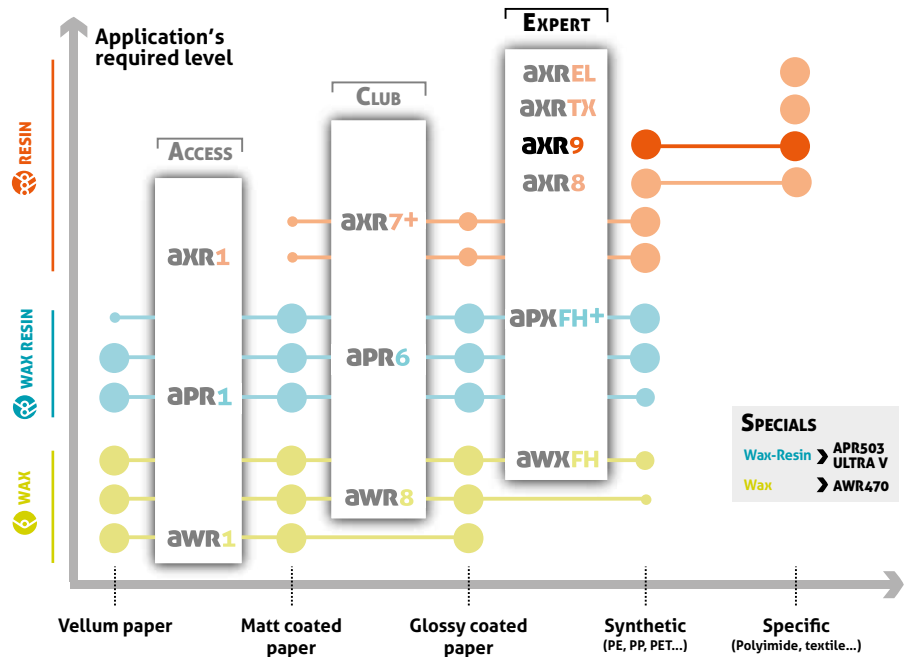


## Printing receptor

synthetics	specific
PP ●●●	Cotton ●●●
PE ●●●	Acetate ●●●
PET ●●●	Nylon ●●●
	Satin ●●●

## Printer settings

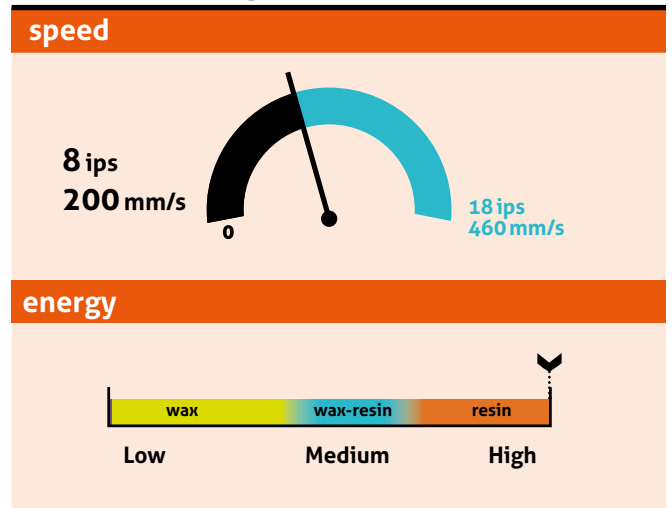

## Print resistance

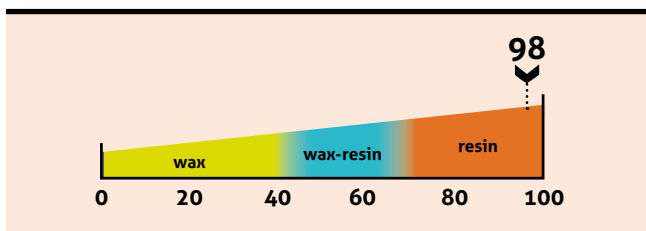

## Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
UL 969

## Your ribbon identity

Colours: ●


Length (m): .....

Width (mm): .....

Part number: .....

Your distributor: .....

Contact : .....



# axr9

## Application fields



## Product performance

print quality					
90°Barcode		A <sub>a</sub> Small characters		Logos	
0°Barcode		2D Barcode		Blackness	
technical resistances					
Heat		Light/Blue Wool		Washing:	
Water/Submerge		Rubbing		Home:	
				Industrial:	
				Dry cleaning:	
				Bleach:	
				Ironing:	

## Product physico-chemical features

product structure	
<b>PET film</b>	Thickness: 4,5 µm
<b>Ink</b>	Resin
Melting point	85°C/185°F
<b>Backcoating</b>	Silicon based
Coefficient of Friction	Kd < 0.2
<b>Ribbon thickness</b>	< 8 µm
The ribbon is anti static build-up treated	

## Storage

### storage conditions

12 months recommended  
20-80 % Humidity Rate, 5-35°C (40-95°F)

## Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.